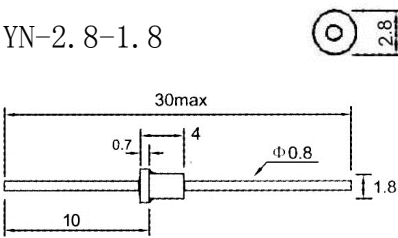
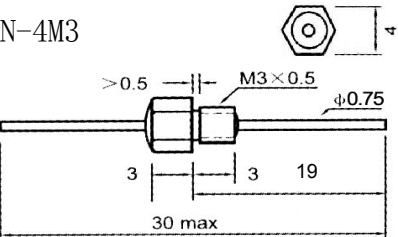
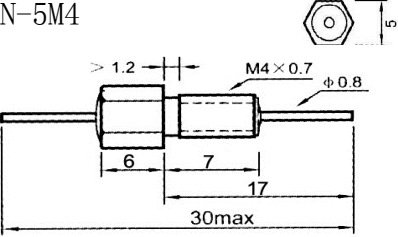
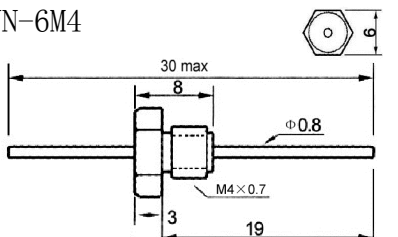


穿心电容规格 (mm)	额定电压	容量范围			电气设置	额定电流
		COG/NPO	X7R	Y5U		
YN-2.8-1.8 	DC200~500V	10~100pF	100p~2.2nF	2.2nF~4.7nF	C	7A
	外壳为陶瓷壳体镀金，直接焊接。					
YN-4M3 	AC100	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	10A
	DC100~500V	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	
YN-5M4 	AC100	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	10A
	DC100	20p~120p	200p~4.4nF	4.4nF~9.4nF	Pi/LC/T	
YN-6M4 	AC100	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	10A
	DC100	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	



补充说明：英制罗纹规格 4-40、6-32、8-32、10-32、12-28、12-32 可专门订制

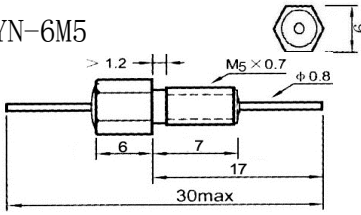
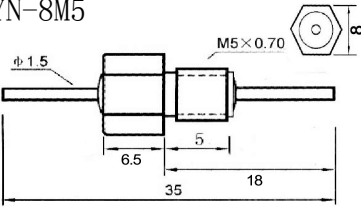
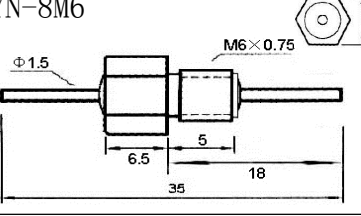
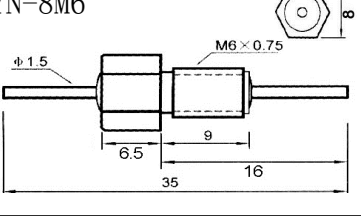
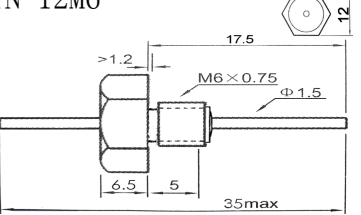
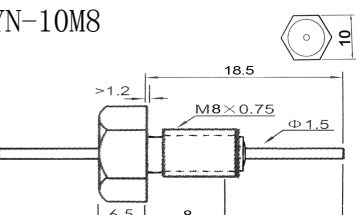
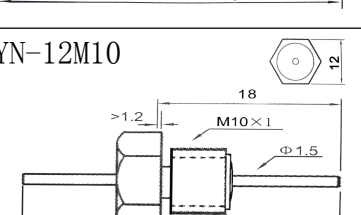


Tel: +86-755-22377750

+86-755-25725757

Fax: +86-755-25725246

http://www.szyinai.com

规格 (mm)	额定电压	容量范围			电气设置	额定电流
		COG/NPO	X7R	Y5U		
YN-6M5 	AC100/250	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	10A
	DC200~1KV	10p~60p	100p~2.2nF	2.2nF~4.7nF	Pi	
YN-8M5 	AC100/250	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	20A
	DC200~1KV	10p~60p	100p~2.2nF	2.2nF~4.7nF		
YN-8M6 	AC200/250	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	20A
	DC500~1KV	10p~60p	100p~2.2nF	2.2nF~4.7nF		
YN-8M6 	AC200/250	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	20A
	DC500~1KV	10p~120p	100p~4.4nF	2.2nF~9.4nF	C/LC/T/Pi	
YN-12M6 	AC250	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	20A
	DC1KV~1KV	10p~60p	100p~2.2nF	2.2nF~4.7nF		
YN-10M8 	AC200/250	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	20A
	DC1KV~1KV	10p~60p	100p~2.2nF	2.2nF~4.7nF		
YN-12M10 	AC200/250 /400	10p~60p	100p~2.2nF	2.2nF~4.7nF	C	20A
	DC1KV~2KV	10p~60p	100p~2.2nF	2.2nF~4.7nF		

